


2 series Surface Stress Meter


The 2 series are developed for measuring the surface stress of chemical tempered glass.




2E

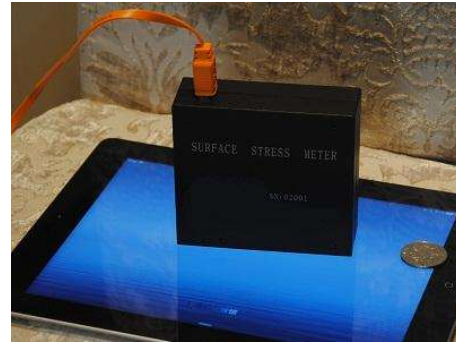

2C

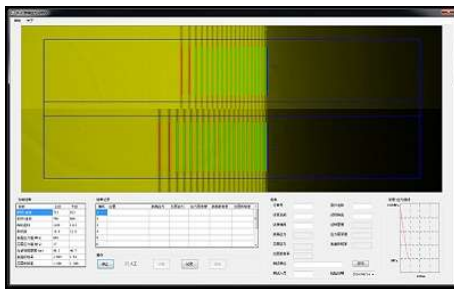

Single ion exchange glass

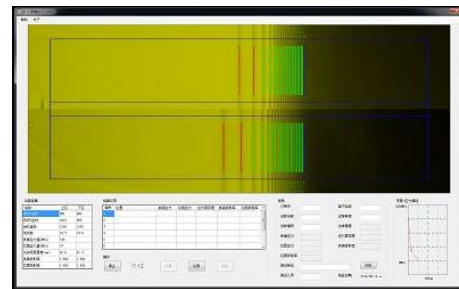

Double ion exchange glass

Feature:

- Easy operation
- Small size
- Single / double ion exchange glass
- Manual operation in case of bad image (with PC software)

Specification:

- Refractive Index: 1.47~1.53(other RI range customized according to requirement)
- Stress :1500MPa
- Depth: 100um
- Accuracy: 20 Mpa/5um
- Light source: 590/750 nm
- Operation System: 2E integrated PDA or 2C PC software (Windows 7 with dot net fame work 3.5 or about)
- Weight: 0.3kg(without PDA)/0.5kg(with PDA)

Contact: GMC POL